


2"X2"X36" FENCE POSTS 10' O/C WITH
WOVEN FENCE (14 1/2 GAGE MIN. MAX.
MESH SPACING) OR 5' O/C WITHOUT WIRE FENCE

FILTER CLOTH (FILTERX, MIRAFI 100X,
STABLINKA T140N OR APPROVED EQUAL) TO
BE FASTENED SECURELY TO FENCE POSTS
WITH STAPLES OR SECURED TO WOVEN
WIRE FENCE (IF USED) WITH TIES SPACED
EVERY 24" AT TOP AND MID SECTION

EMBED FILTER CLOTH
MIN. 8" INTO GROUND

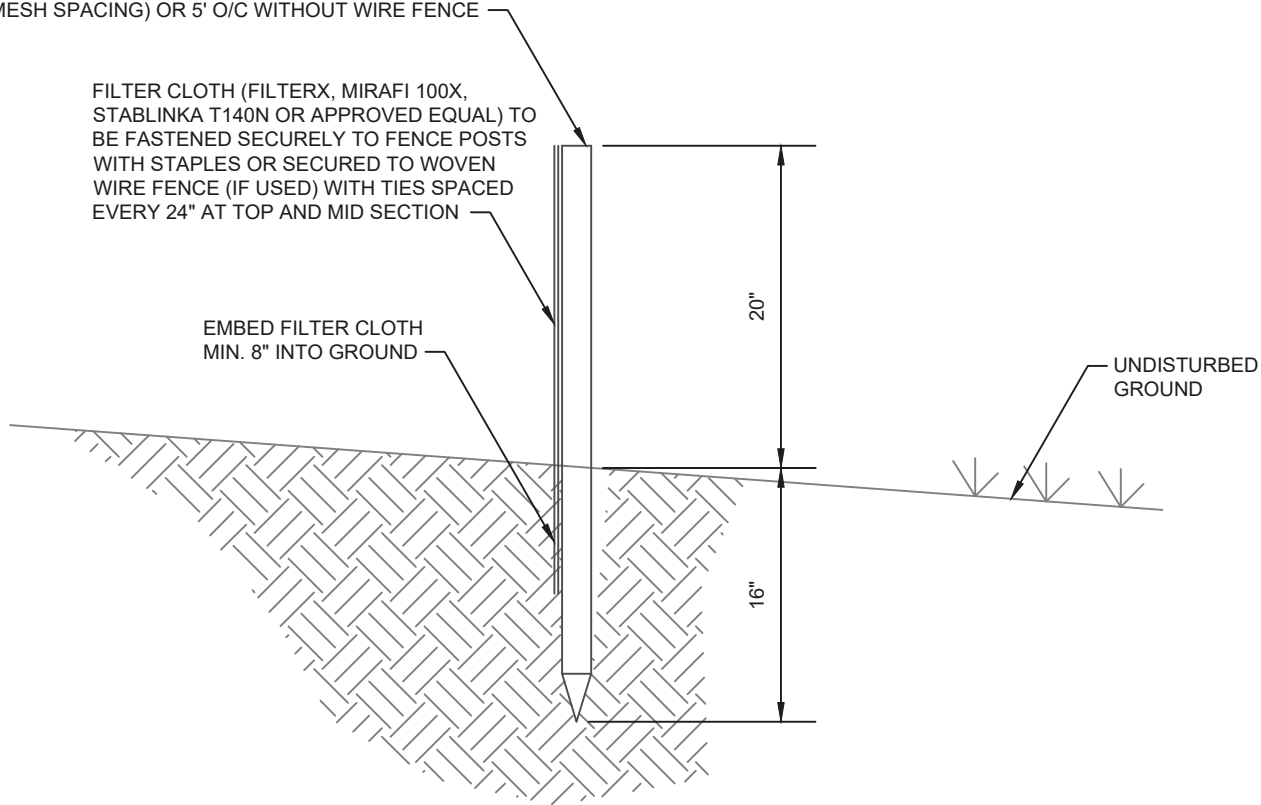

GENERAL NOTES:

SILT FENCE SHALL BE INSTALLED AND INSPECTED BY THE CITY PRIOR TO ANY OTHER CONSTRUCTION

WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER THEY SHALL BE OVERLAPPED BY 6" AND FOLDED.

TOPSOIL STOCKPILES SHALL HAVE DIVERSION DITCHES PLACED AROUND THEM WITH A SILT TRAP BUILT AT THE LOW POINT OF THE DITCHES.

SILT FENCE TO BE PROVIDED AROUND ENTIRE PERIMETER OF ALL WETLAND AREAS PRIOR TO MASS EARTHWORK START.

MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN SILT FENCE.

SILT FENCE SHALL BE INSTALLED USING MACHINE METHOD.

STANDARD EC-001



CITY OF WEST CHICAGO
475 MAIN STREET
WEST CHICAGO, IL 60185
PHONE: 630-293-2255
FAX: 630-293-2971

SILT FENCE

CITY OF WEST CHICAGO
CONSTRUCTION SPECIFICATIONS,
STANDARDS, AND DETAILS

REVISIONS

NO.	DESCRIPTION